

THE MINI

BRUDERER+

— PRECISION —

Punch Press

100 - 500 Standard
800 Special

- + Small tonnage precision straight side press
- + Adjustable stroke for job versatility
- + Used as free standing or table mounted
- + Totally inclinable for horizontal applications
- + Optional feed mounting of front to back, left to right or right to left
- + Unlimited special purpose applications some of which are currently adapted:
 - Contact Welding Lines
 - Film Processing
 - Components for the surgical and electronic industries.



MADE IN USA

			100-32	100-37
Press force		kN	100	100
Tool loading area	L - R	mm	319	371
Speed		spm	100-500	100-500
8mm Fixed Stroke Machine		spm	100-800	100-800
Mains voltage (EN 60204)		V	240/480	240/480
Mains frequency (EN 60204)		Hz	50/60	50/60
Connected load	Max.	kVA	10	10
Control voltage		VDC	24	24
Drive power of main motor		kW	2.2	2.2
Compressed air connection R 1/ 2"	Min. Max.	bar	6/10	6/10
Adjustable stroke		mm	7 / 13 / 19 / 25 / 32 / 38	7 / 13 / 19 / 25 / 32 / 38
Fixed stroke	Max.	mm	38	38
Ram adjustment range		mm	38	38
Shut height (according to stroke)	Min. Max.	mm	127 165	127 165
Bolster area	L - R F - B	mm	340 279	392 279
Ram area	L - R F - B	mm	319 248	371 248
Strip inlet width (machine)	Max.	mm	187	187
Base plate opening	L - R F - B	mm	279 76	279 76


Dimensions

Length	mm	971	971
Height	mm	1760	1760
Width	mm	965	965
Weight	kg	1140	1140

Strip feed unit

Servo Feed

Contact Bruderer for available options.

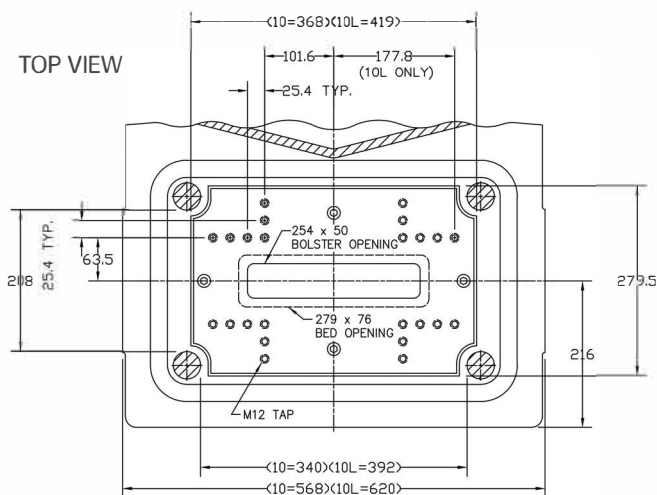

BOTTOM VIEW

